

07/24/00
jc872 U.S. PTO

07-25-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 476-1933	
First Inventor or Application Identifier	Mauger
Title	Communications Network
Express Mail Label No.	EL 388 802 210 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 15]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 9]
4. Oath or Declaration [Total Pages 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)]
14. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other: _____

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner: _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label [] or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	William M. Lee, Jr.				
	Lee, Mann, Smith, McWilliams, Sweeney & Ohlson				
Address	P.O. Box 2786				
City	Chicago	State	Illinois	Zip Code	60690-2786
Country	USA	Telephone	(312) 368-1300	Fax	(312) 368-0034

Name (Print/Type)	William M. Lee, Jr.	Registration No. (Attorney/Agent)	26,935
Signature	<i>William M. Lee, Jr.</i>	Date	7/24/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Please acknowledge
receipt of the
enclosed

Roy Harold Mauger

Serial No. To be Assigned

Filed. Herewith

For: Communications Network

1. Utility Patent Application Transmittal
2. Fee Transmittal for FY 1999 in Duplicate
3. Assignment Recordation Form Cover Sheet
4. Signed Assignment
5. Claim for Priority
6. Certified Copy of Said Application
7. Declaration and Power of Attorney
6. 15 Page Specification with 9 Sheets of Drawings
7. Certificate of Express Mailing
8. Check No. 40704 for \$808
9. Return Postcard

DUE DATE (If Any): N/A

DATE SENT: July 24, 2000

"Express Mail" mailing label number

EL388802210US

Date of deposit: July 24, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Richard Sensenbrenner

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

COMMUNICATIONS NETWORK**FIELD OF THE INVENTION**

This invention relates to arrangements and methods for the switching or routing of traffic in a communication network

BACKGROUND OF THE INVENTION

5 Traditionally, two types of legacy telecommunication networks have been developed. The first type of legacy network is connection oriented and is used for the transport of narrow band voice traffic, typically carried in TDM frames. Such networks comprise for example synchronous or plesiochronous networks. The second type of legacy
10 network is connectionless in nature and is used for the transport of broad band packet or cell-based data traffic. Such packet traffic includes for example Internet protocol (IP) traffic. There is currently a drive towards unified networks which provide end to end transport for both voice and data services, and to this end the use of asynchronous transport has been introduced. This of course introduces the problem of supporting different protocols over a common network.

15 Asynchronous Transfer Mode (ATM) is the technology specified by the ITU-T as a broadband network technology suitable for all applications. For Internet protocol traffic however, ATM has proven to be less than fully effective at supporting Layer 3 routed applications, such as routed virtual private networks. This has led the IRTF
20 (Internet Research Task Force) to specify multi-protocol label switching (MPLS) as a technology which inherits the desirable characteristics of ATM but is better matched to the Internet protocol. In particular MPLS provides a frame merge function in which data frames received from multiple sources are captured and sent out with a common label. This is required for the support of Internet Protocol Layer 3 Routed
25 services. Service providers would ideally prefer a single network technology to support all of the services that they provide as this would achieve the lowest possible operational cost.

A particular problem with the introduction of a multi-service network is that of
30 accommodating the various transport protocols and, in particular, that of providing end to end quality of service guarantees for high priority traffic such as voice. In particular, there is a need to provide a network that can carry both data and voice traffic at a local, national and international level while utilising a common transport

protocol. A further problem with such a network is that of real time management of the virtual public/private networks that are established within the network. At present, each VPN manager requires a detailed knowledge of the network topology. In a large network this is a very significant operational task.

5

Reference is here directed to Multiservice Switching Forum Contribution Number: MSF 99.245 (Multiservice Switching Forum System Architecture Implementation Agreement) available at www.msforum.org, the contents of which are incorporated herein by reference.

10

SUMMARY OF THE INVENTION

An object of the invention is to minimise or to overcome the above disadvantage.

15

According to a first aspect of the invention, there is provided a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture whereby IP services are run directly over a frame-based core network and legacy services are run over ATM adaptations and emulated ATM services.

20

According to a further aspect of the invention, there is provided a method of operating a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels, wherein ATM is used for low or medium capacity access, and wherein frame mode is used frame-mode is used for access to corporate users and for core transport.

25

According to another aspect of the invention, there is provided a communications network comprising a plurality of core nodes establishing a transport network, service nodes each coupled to a said core node to provide access to the transport network, and a network management system arranged to define and manage one or more virtual public/private networks within said communications network, wherein groups of said core nodes are configured as abstract nodes within which abstract nodes any available path may be selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes..

30

35

Advantageously, a virtual private/public network is defined with multiple stages of constraint-based routed label switched paths.

5 MPLS has been defined by the IETF so as to be independent of the underlying transport mechanism. Mappings on to ATM have been defined as well as frame-mode networks using HDLC (Highland data link control) based or other forms of frame transport.

10 MPLS includes the concept of stacked labels. We have found that this allows the networks described herein to operate at multiple layers. For instance a first label in the stack can relate to a traffic trunk. A switch which only swapped this first label would handle the traffic trunk transparently. A switch which popped the first label, swapped the second label and pushed a new first label would be switching a service instance between two traffic trunks. A set of such traffic trunks allocated to a service
15 sub-network and switching by swapping the second label, provides an equivalent of the MSF virtual switch concept. However, in the MPLS case, virtual switches are only visible at designated service nodes as their traffic trunks pass transparently through core nodes.

20 The ATM Forum has defined a mechanism for the transport of ATM over HDLC (High-Level Data Link Control) based frame-mode transport and has engaged on an activity to specify the use of this mechanism in frame-based MPLS networks. In particular the methods for mapping ATM services and traffic contracts onto their MPLS equivalents will be specified.

25 The arrangement and method enable the definition of a frame-mode MPLS version of the MSF architecture, in which, IP services can run directly over the frame-based core network and legacy services can run over ATM adaptations and emulated ATM services.

30 The network architecture may be mapped onto the MSF architectural model, and in particular adapts the use of constraint-based routed label distribution protocol (CR-LDP) to simplify the task of super-ordinate and sub-ordinate network management.

35 Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:-

5

Figure 1 is a schematic diagram of an exemplary virtual public/private network according to a preferred embodiment of the invention;

10

Figure 2 shows the construction of an abstract node employed in the network of figure 1 and illustrates the network construction in further detail;

15

Figure 3 shows an exemplary Layer 1 management and bearer control architecture;

20

Figure 4 illustrates a virtual public/private network information model;

Figure 5 illustrates a Layer 2 management and bearer control architecture;

25

Figure 6 illustrates the construction of a service node supporting ATM SVC service;

30

Figure 7 illustrates the construction of a service node supporting leased-lines;

Figure 8 illustrates the construction of a service node for SIP session-switched services; and

35

Figures 9a to 9d shows comparisons between adaptation and switching plane functions for preferred embodiments of the invention and for legacy networks .

DESCRIPTION OF PREFERRED EMBODIMENTS

Referring first to figure 1 this figure illustrates in highly schematic form an exemplary virtual public/private network (VPN) deployed nationally or regionally in order to provide session switched multimedia services on a territorial basis. The network comprises a number of service nodes 11, located at the main centres of population, inter-linked via a network of core nodes by quality-of-service (QoS) capable tunnels 12. The construction of the core network will be described below. In figure 1 only one core node 18 is shown in the interests of clarity. Access to the network from user terminals 13 is provided via media gateways 14 each serving to one or more service nodes. Traffic is transported on constraint-based routed label switched paths (CR-LSP) 15 established between respective gateways. The network carries packet traffic, each packet 16 comprising a payload and first and second labels (Label1, Label2) indicative of the path over which the packet is to be routed.

- 15 CR-LSPs (constraint based label switched paths) are deployed between the service nodes. Services such as inter-active voice, requiring strict QoS guarantees are supported by end-to-end CR-LSPs 15 as illustrated in figure 1. To take a simple example of QoS support, if all of the CR-LSPs at both traffic-trunk level and end-to-end are constant bit rate, then the performance of the end-to-end CR-LSP can be
- 20 substantially equivalent to ATM-AAL1 (asynchronous transfer mode adaptation layer one) assuming 48-byte packetisation.

- In our arrangement, the MPLS, the CR-LDP protocol is used to establish the constraint-based routed label switched paths (CR-LSP). These are point-to-point
- 25 paths between designated nodes that are assigned a traffic contract which, in suitable carrier strength implementations, will be policed for conformance. Such a CR-LSP has an LSPID (label switched path identifier) which can be used to specify a hop in a CR-LDP request. In such a case the new CR-LSP will be multiplexed into the specified CR-LSP and allocated a second level label. This concept is used to
- 30 specify a virtual public/private network (VPN) with multiple stages of first level CR-LSPs and to provide end-to-end services having a CR-LSP traffic contract. It is also possible to use GSMP to switch between pairs of labels to achieve the same effect as Virtual Switch control in Release 1. In the network of figure 1, GSMP control or CR-LDP control of the two-label stack can be employed depending on the service
- 35 objective

A feature of the CR-label distribution protocol (CR-LDP) employed herein is the use of an "abstract node" to define routing constraints. An abstract node consists of a sub-network of real nodes (core nodes) over which CR-LDP is allowed to select any available path to achieve the requested connection. Thus in a path specified as (real
5 node A-abstract node B-abstract node C-real-node D) there may be multiple nodes in each of the abstract nodes, there may also be multiple trunks between the abstract nodes. This simplifies the management of a VPN as the network manager only requires a view of the network at the abstract node level and does not require detailed view of the construction or internal operation of an abstract node.

10

Referring now to figure 2, this depicts in schematic form a portion of the network of figure 1. Figure 2 is a representation of a simple network in its abstract node form, together with a possible real network version of one of the abstract nodes.

15 The network represents groups of multiple service nodes (SN) 11 each arranged around a respective abstract node (AN) 22 in each of four locations. One of the abstract nodes 22 is shown in detail to illustrate its construction from a sub-network of four core nodes (CN) 18 with multiple transport links 24. In the network of figures 1 and 2, an abstract node is defined by an IP address prefix, and all core nodes
20 which include that prefix in their IP address are part of the abstract node. It will of course be understood that an abstract node may be constructed from some other number of core nodes. Further, abstract nodes can have a temporary, semi-permanent or permanent existence depending on the network requirements.

25 Constraint based routed label switched paths 15 are deployed between service nodes 11 via the intervening abstract nodes 22.

In the arrangement of figures 1 and 2, it is relatively simple for a management system controlling the real network to produce an abstract node version of its information
30 model for use on a super-ordinate network manager. It is also easy to produce a graphical representation of such a network and to specify traffic trunks by drawing paths between service nodes passing through abstract nodes. These graphical paths can then be used to automatically construct CR-LDP requests to establish the traffic trunks. CR-LDP can run on an existing constraint-based routed label switched
35 path (CR-LSP) to renegotiate the traffic contract so the scheme provides for near real-time creation of VPNs as well as flexible service level agreements which can be modified on a diurnal basis or on any basis which suits the customer traffic profile.

- A management and bearer control function for the layer 1 physical network of figures 1 and 2 is illustrated in figure 3. This figure shows by way of example a simple network based on core nodes 18, constituting an abstract node 22, and service nodes 21. The real network has a management system based on a hierarchical structure of element managers 31 and (sub) network managers 32. The (sub) network manager 32 is responsible for constructing the abstract node information model representation of the network which it passes to a super-ordinate manager 33. A sub-ordinate manager 36 provides virtual switch management to perform fault, configuration, accounting, performance, and security management. The super-ordinate manager 33 is used for defining VPNs and placing traffic trunks to realise those VPNs. The super-ordinate manager also creates, modifies and deletes virtual switches. Traffic trunk requests are passed to bearer control Layer 1 (34) to initiate the CR-LDP process, this is the bc reference point for Layer 1 for which the common open policy service protocol (COPS) is preferred. The Layer 1 bearer control function 34 could in some applications be de-coupled from the physical switch using a VSC (virtual switch control) reference point general switch management protocol (GSMP) interface.
- The information model illustrated in figure 4 for the sub-network manager 32 is also simplified in that only the Layer 2 virtual switches (VS) 41 are visible. These virtual switches are configured with access ports 42 to which users are connected and traffic trunks 43 configured end-to-end and provisioned with SLAs.
- As the VPN is only visible at service nodes, then the Layer 2 bearer control function need only be applied at service nodes. For the end-to-end high QoS CR-LSPs discussed above there are two possibilities for controlling the connection. These are CR-LDP as discussed above or GSMPv3.
- This is illustrated in figure 5 in which the bearer control Layer 2 (51) is shown using GSMPv3 at the VSC reference point, private network-network interface (PNNI) at the inter-MSS bearer control signalling (IC) reference point, and UNI v 4.0 Proxy at the bearer control (BC) reference point.
- For the bearer control Layer 2 there are a number of candidates, some options will be considered below in the context of the following:-
- ATM SVC service network

- Leased-line service network
- SIP based session-switched multimedia service network

A service node providing ATM SVC service with its associated control functions are shown in figure 6. Referring to figure 6, the logical port function 61 in the adaptation plane provides adaptation from an ATM adaptation function to an end-to-end CR-LSP. Advantageously, General Switch Management Protocol (GSMP) is used on the VSC reference point in order to cross-connect the end to end CR-LSP between input and output traffic trunks of the virtual switch 41 in the switching plane. H.248 protocol may be used to configure an ATM adaptation function in the logical port 61, to establish the end-to-end CR-LSP in the media gateway and to cross-connect the adaptation function with the end-to-end CR-LSP. UNI v 4.0 Proxy and PNNI are used at the BC and IC reference points as discussed above.

In the case of a leased-line service network, the sub-ordinate manager 36 (figure 7) subsumes all of the functions in the control plane. is the manager 36 able to use CR-LDP embedded in the network to control the virtual switch 41 implicitly by specifying the series of traffic trunks that the sub-ordinate manager wishes to use for the end-to-end connection. It then uses e.g. H.248 to configure an appropriate adaptation function and cross-connect this to the end-to-end CR-LSP. This procedure is illustrated schematically in figure 7. This sub-network manager could advantageously represent the whole virtual network as an abstract node, in which case end-to-end routing is fully controlled by the embedded CR-LDP function.

For the SIP based session-switched service network a proposal has been made to the IETF to consider simple Internet protocol (SIP) as a bearer control protocol for managing end-to-end CR-LSPs. The advantage of deploying SIP in this application is that it is able to explore multiple paths in parallel and to record the route taken. In the referenced document the recorded route of the preferred path is then used to initiate CR-LDP using COPS over the SP reference point, this is consistent with existing MPLS standards but in fact leads to a bearer control which requires two round trips of signalling to execute a connection. A preferred approach would be to use SIP at the IC reference point and GSMP at the VSC reference point which could execute a connection with a single signalling round trip. This preferred approach is illustrated in figure 8.

In this case the logical port function 61 is constituted by a packet relay such as a Firewall. Preferably, H.248 is used to configure firewall functions such as PPP or L2TP terminations, network address translators, etc. H.248 is also used to establish the end-to-end CR-LSP in the media gateway and to cross-connect the corresponding IP ports to the end-to-end CR-LSP for real-time services. For web access services the logical port function would provide a proxy for secure access to the Internet; this is not shown. GSMP is used over the VSC reference port to control the virtual switch. SIP is used over the IC reference point to interrogate multiple paths. Multiple invites are received at the destination bearer control function but only one OK message is sent on the preferred path. This can trigger the GSMP function on the intermediate virtual switches to complete the connection. SIP is also used on the ia interface as implied by the service node definition. SIP can also be used to provide the equivalent function to the topology state packet in PNNI so that the bearer control function 62 can be aware of remote congestion points in the network and take avoiding action. Further the bearer control function can also act as a subordinate management function. To do this, the bearer control function acts as a relay point for the COPS messages from the super-ordinate manager to the Layer 1 bearer control function and exchanges topology and state information with other parts of the distributed bearer control function.

Frame-mode transport is considered to be ahead of ATM transport i.e. OC192/STM64 versus OC48/STM16 for line speed operation. Clearly four such OC48/STM16 trunks may be multiplexed up for transport at OC192/STM64 but line-speed operation provides the simplest architecture. Depending on assumptions about traffic mix, then frame-mode transport is somewhat more efficient than ATM transport as illustrated by way of example in the following table. For 20% Legacy and 80% IP the MPLS Core is approximately 10% more efficient than an ATM Core.

Table 1

IP Packet (bytes)	% of Total Packets	IP/MPLS/P OS	Legacy/AT M/MPLS/P OS	IP/ATM	Legacy/AT M
44	58%	84		106	
552	21%	592		636	
576	3%	616		689	
1500	18%	1540		1696	
IP Weighted Mean					
429		469		521	
Legacy Traffic ATM AAL1 & AAL2	20%		68		53
Total Weighted Mean					
		MPLS Core		ATM Core	
		389		429	

- 5 For links of OC12/STM4 and above, then frames of 1500 bytes do not cause significant delay variation for short real-time packets.

The arrangement and method described above provide a network model in which: -

- 10
- ATM is used for low or medium capacity access e.g. xDSL, third generation wireless and T1/E1 leased-lines,
 - frame-mode is used for access to corporate sites,
 - frame-mode is used for core transport.
 -

- 15 This provides a better match for emerging technologies than a MSF model which seeks to impose ATM for all core applications. A comparison of the adaptation and switching plane functions for the ATM and MPLS core network options is illustrated in figures 9a to 9d.

- 20 Figures 9a to 9d shows comparisons between adaptation and switching plane functions for preferred embodiments of the invention (figures 9a and 9b) and for legacy networks (figures 9c and 9d). the figures illustrate comparisons of the adaptation and switching plane functions for ATM and MPLS core networks and show the reduction in management complexity provided by the arrangement and method described above.

25

It will be understood that the above description of a preferred embodiment is given by way of example only and that various modifications may be made by those skilled in the art without departing from the spirit and scope of the invention.

CLAIMS:-

1. A communications multi-service network comprising a plurality of nodes
5 interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture whereby IP services are run directly over a frame-based core network and legacy services are run over ATM adaptations and emulated ATM services.
- 10 2. A communications network comprising a plurality of core nodes establishing a transport network, service nodes each coupled to a said core node to provide access to the transport network, and a network management system arranged to define and manage one or more virtual public/private networks within said communications network, wherein groups of said core nodes are configured as
15 abstract nodes within which abstract nodes any available path may be selected to achieve a requested connection, and wherein end to end label switched paths are established via the management system by specifying a series of abstract nodes.
- 20 3. A communications network as claimed in claim 2, wherein each said path is specified by identifying first and second real nodes and one or more abstract nodes therebetween.
- 25 4. A communications network as claimed in claim 3, wherein a said virtual public/private network (VPN) is defined with multiple stages of first level constraint-based routed label switched paths.
- 30 5. A communications network as claimed in claim 4, wherein each said abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are part of that abstract node.
6. A communications network as claimed in claim 5, and incorporating a super-ordinate management function arranged to control creation, modification and
35 deletion of virtual switches.

7. A communications network as claimed in claim 6, wherein said super-ordinate manager is adapted for defining virtual private/public networks (VPN) and for placing traffic trunks to realise those VPNs
- 5 8. A communications network as claimed in claim 7, and incorporating a subordinate management function arranged to provide virtual switch management.
9. A communications network as claimed in claim 8, wherein a (sub) network manager is responsible for constructing an abstract node information model
- 10 representation of the network which it passes to a super-ordinate manager.
10. A method of operating a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels, wherein ATM is used for low or medium capacity access, and wherein frame mode is
- 15 used frame-mode is used for access to corporate users and for core transport.
11. A method of operating a communications multi-service network comprising a plurality of core nodes establishing a transport network, and service nodes each coupled to a said core node whereby access to the transport is provided, and
- 20 having a network management system arranged to define and manage one or more virtual public/private networks within said communications network, the method comprising configuring groups of said core nodes as abstract nodes within which any available path may selected to achieve a requested connection, and wherein end to end label switched paths are established via the
- 25 management system by specifying a series of abstract nodes.
12. A method as claimed in claim 11, wherein each said path is specified by identifying first and second real nodes and one or more abstract nodes therebetween.
- 30 13. A method as claimed in claim 12, wherein a said virtual public/private network (VPN) is defined with multiple stages of first level constraint-based routed label switched paths.
- 35 14. A method as claimed in claim 13, wherein each said abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are part of that abstract node.

15. A method as claimed in claim 14, and including creation, modification and deletion of virtual switches via a super-ordinate management function.
- 5 16. A method as claimed in claim 15, wherein said super-ordinate manager is adapted for defining virtual private/public networks (VPN) and for placing traffic trunks to realise those VPNs.
- 10 17. A method as claimed in claim 16, wherein ATM is used for low or medium capacity access, and wherein frame-mode is used for access to corporate sites and for core transport.

ABSTRACTCOMMUNICATIONS NETWORK

- 10 A communications network comprises a plurality of core nodes establishing a transport network, and service nodes each coupled to a core node and providing access to the transport network. A network management system is arranged to define and manage one or more virtual public/private networks within the communications network. Groups of core nodes are configured as abstract nodes
- 15 within which any available path may be selected to achieve a requested connection. End to end label switched paths are established via the management system by specifying a series of abstract nodes

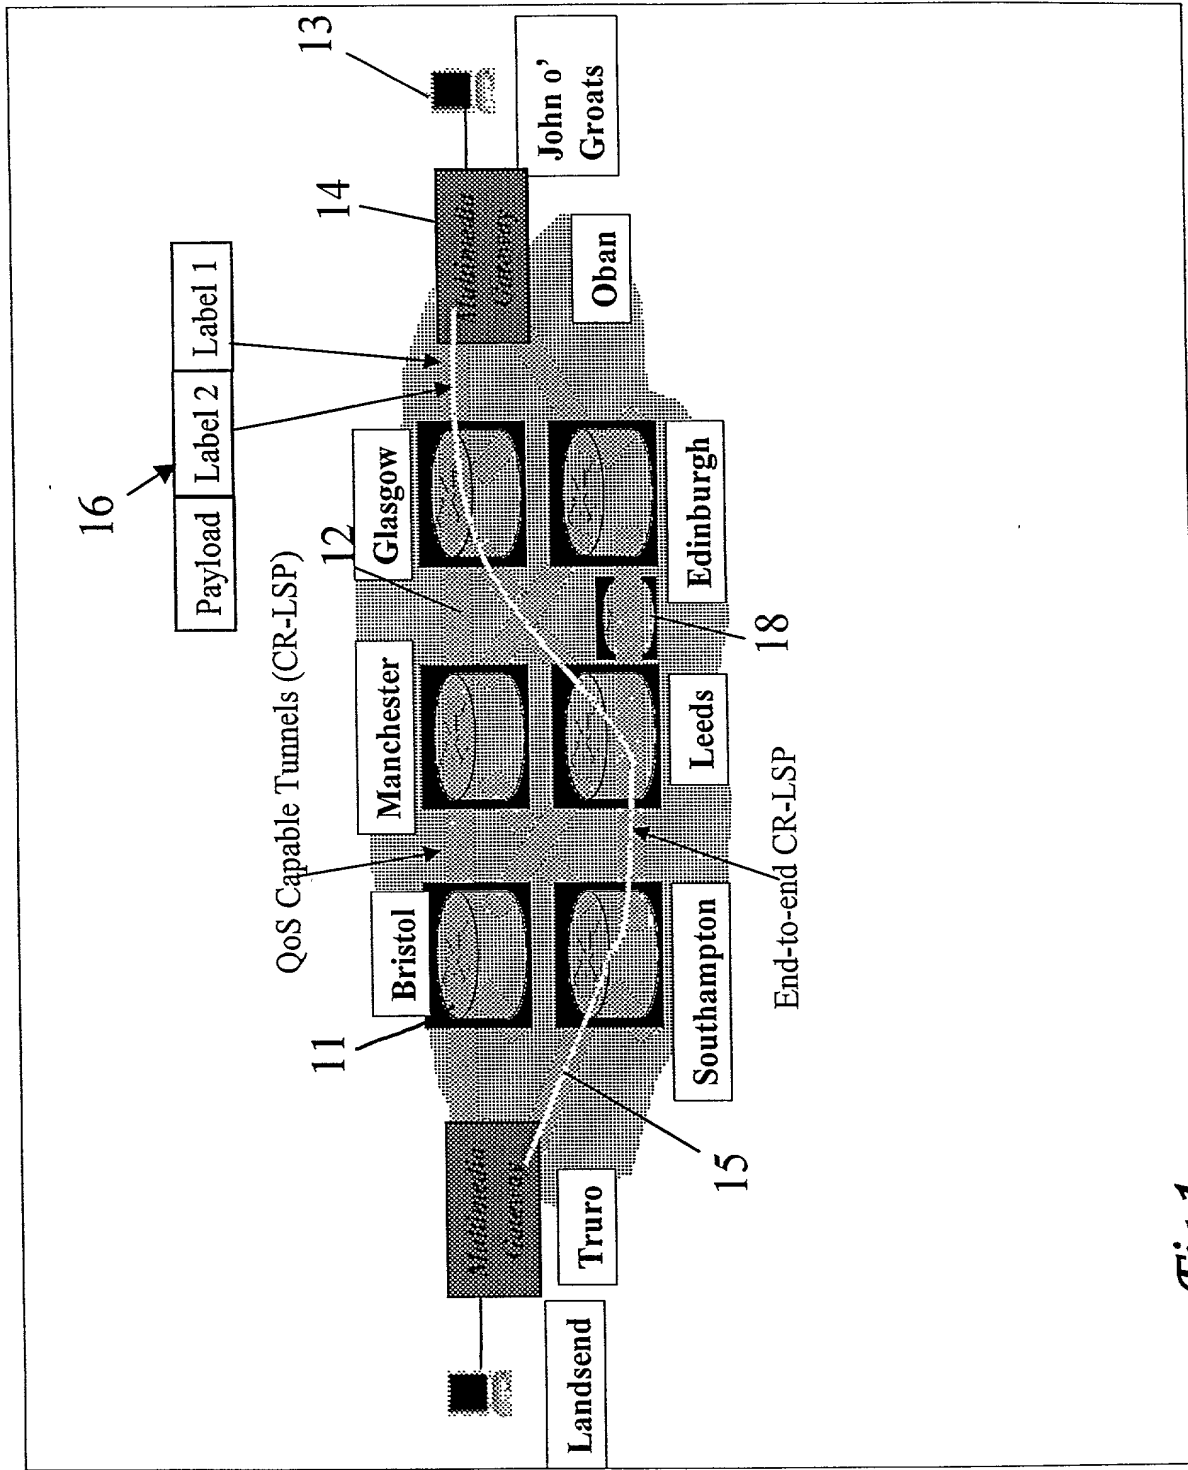


Fig. 1

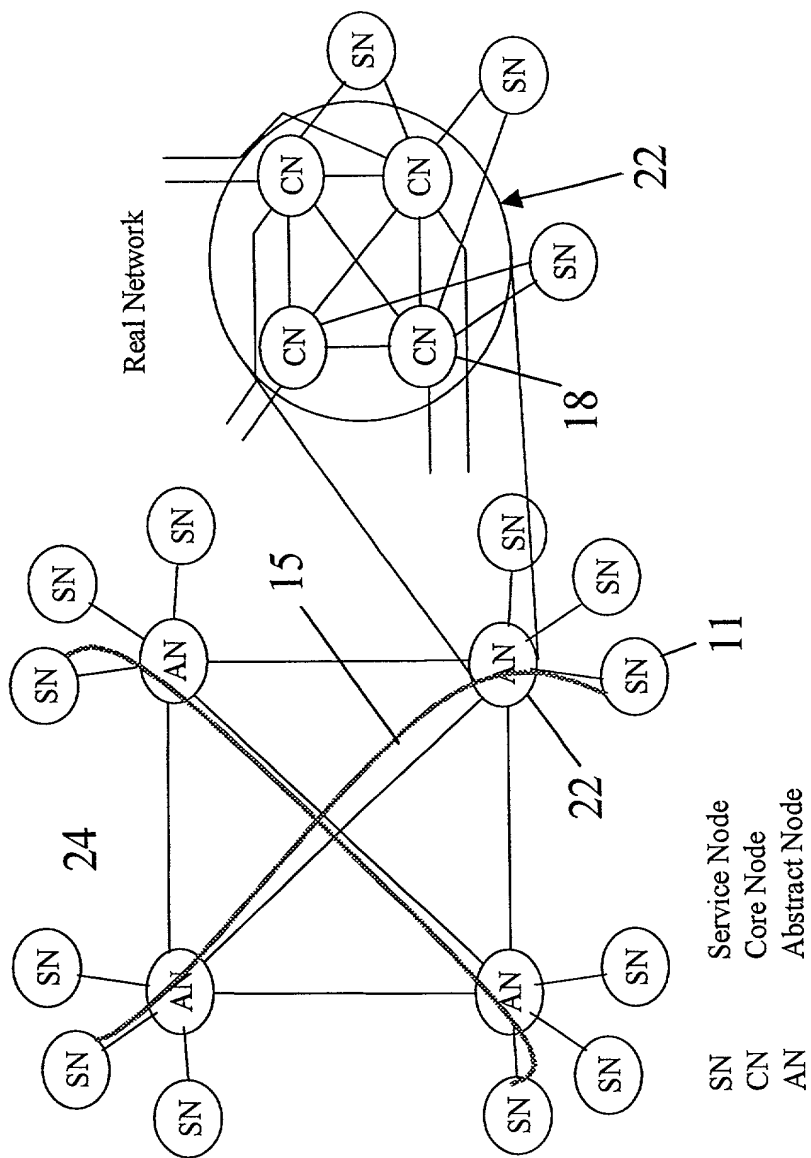


Fig. 2

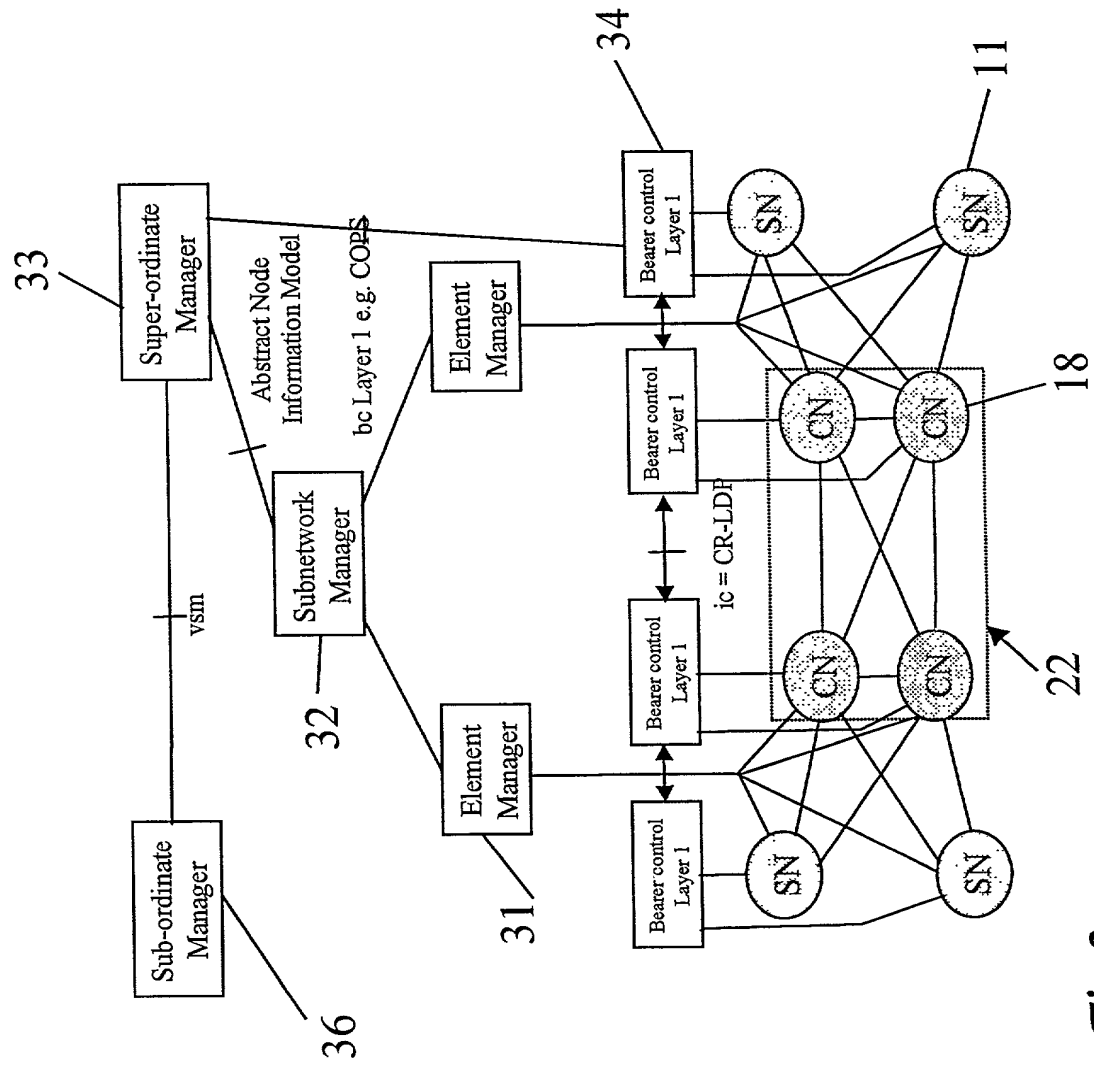


Fig.3

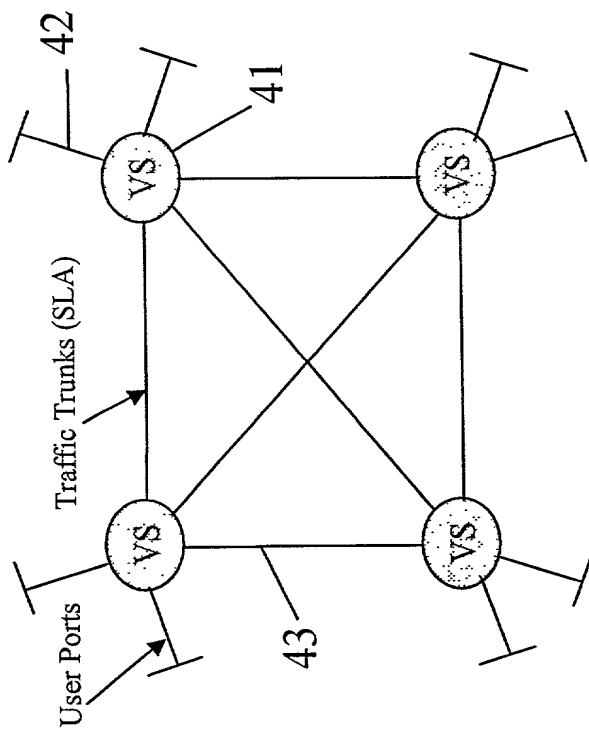


Fig. 4

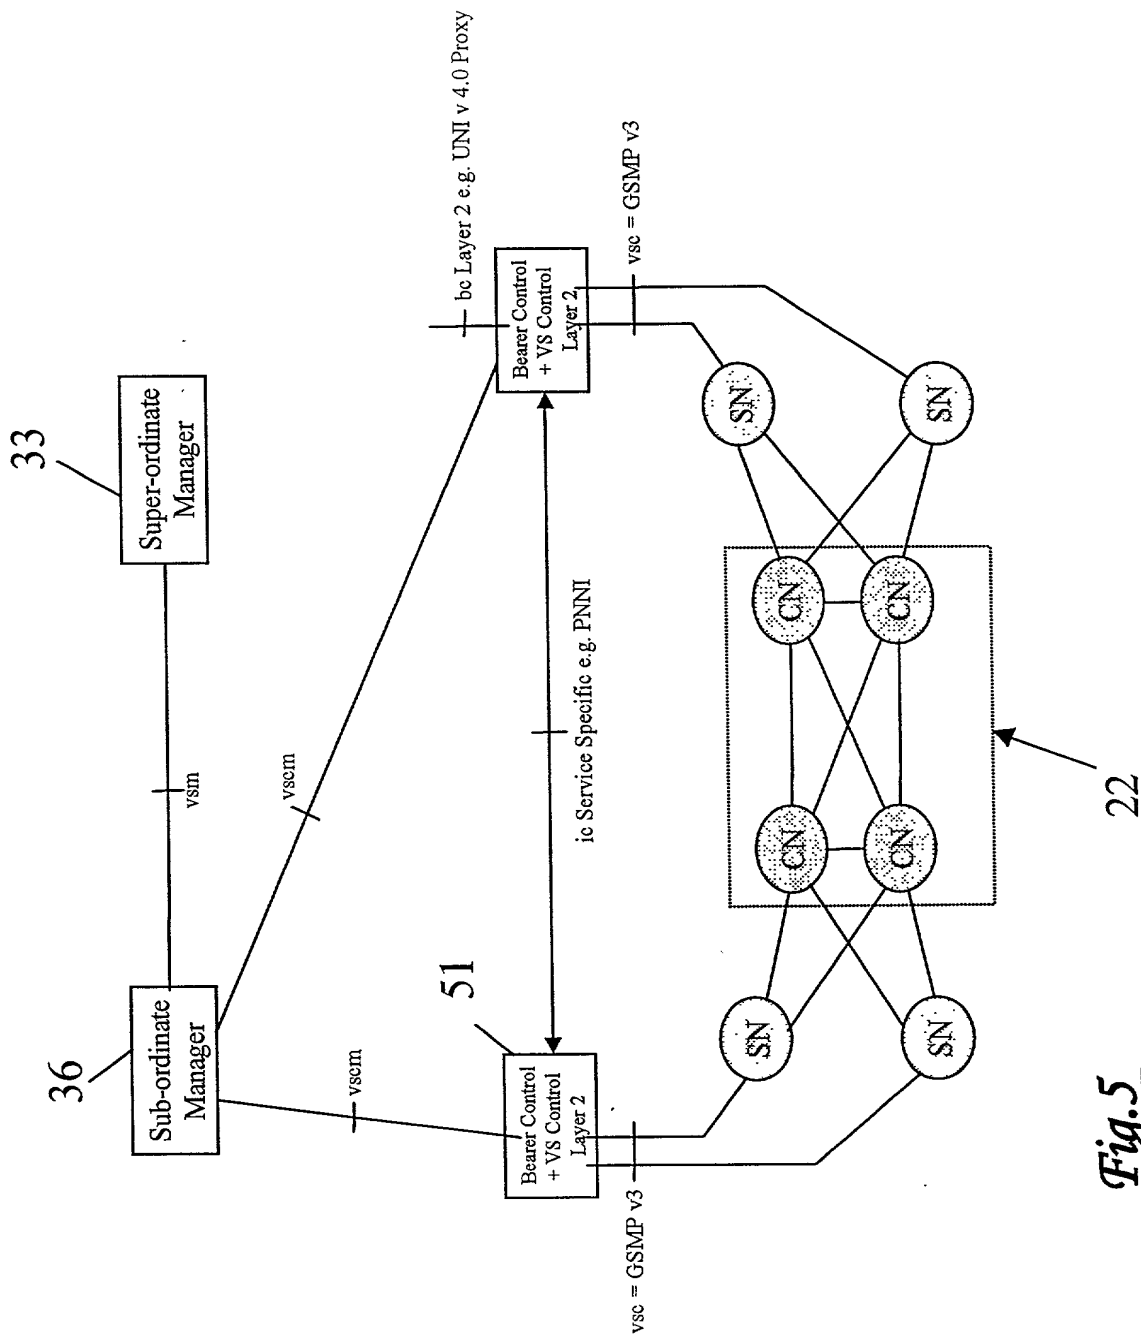


Fig.5

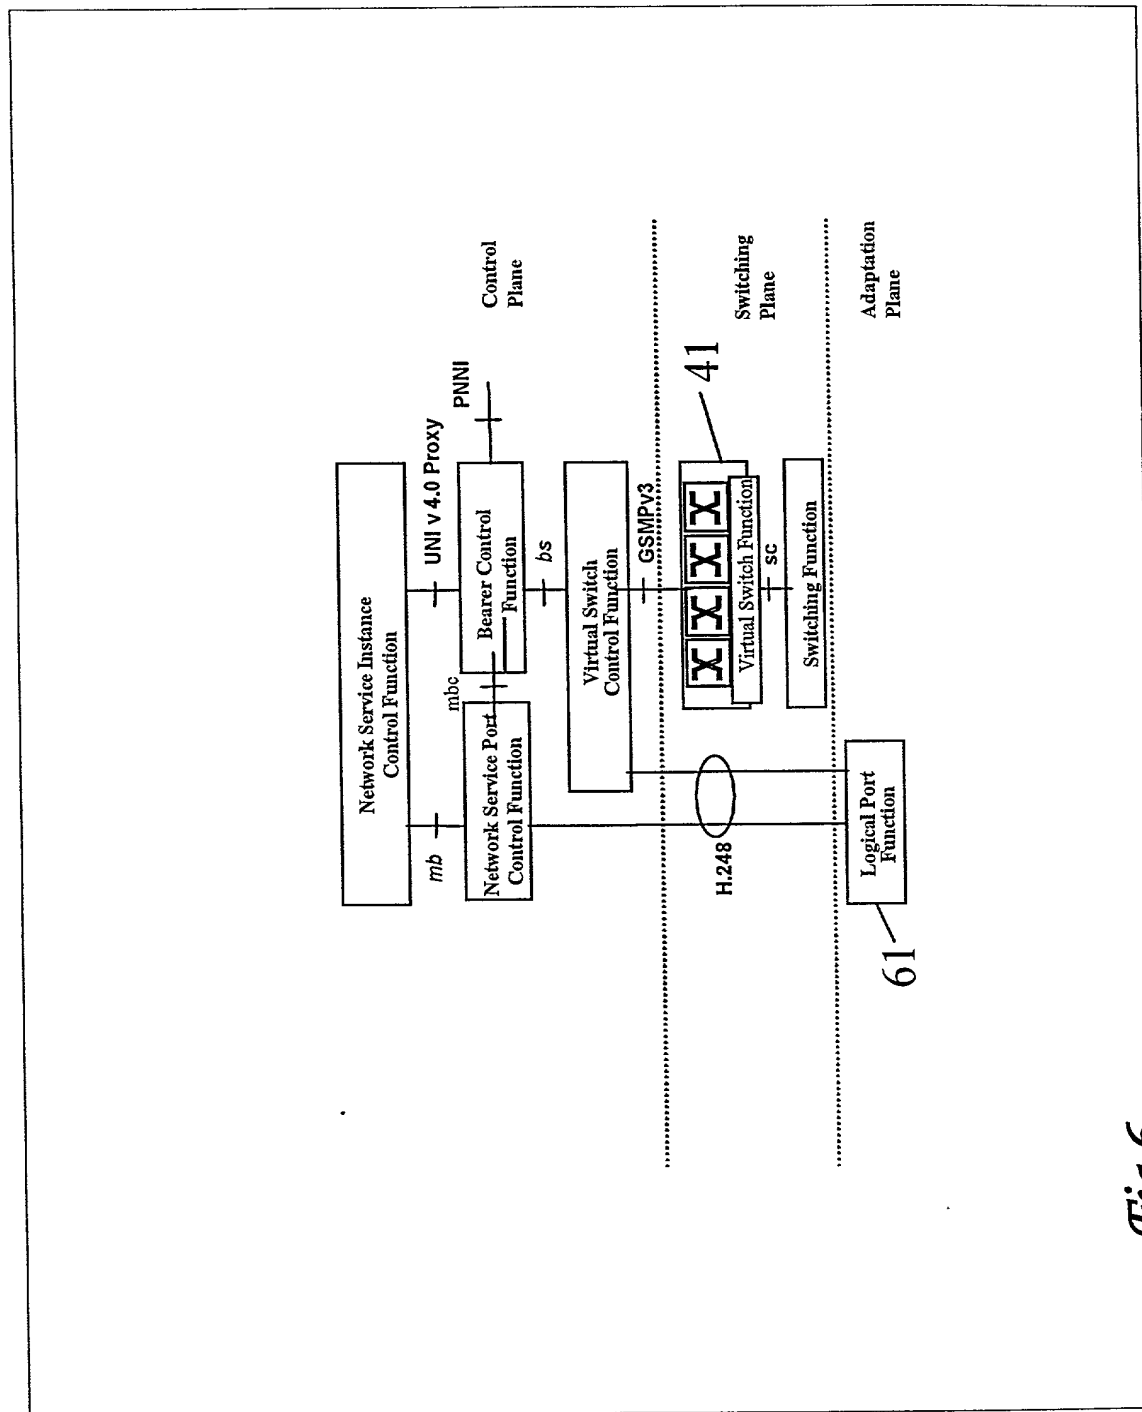


Fig.6

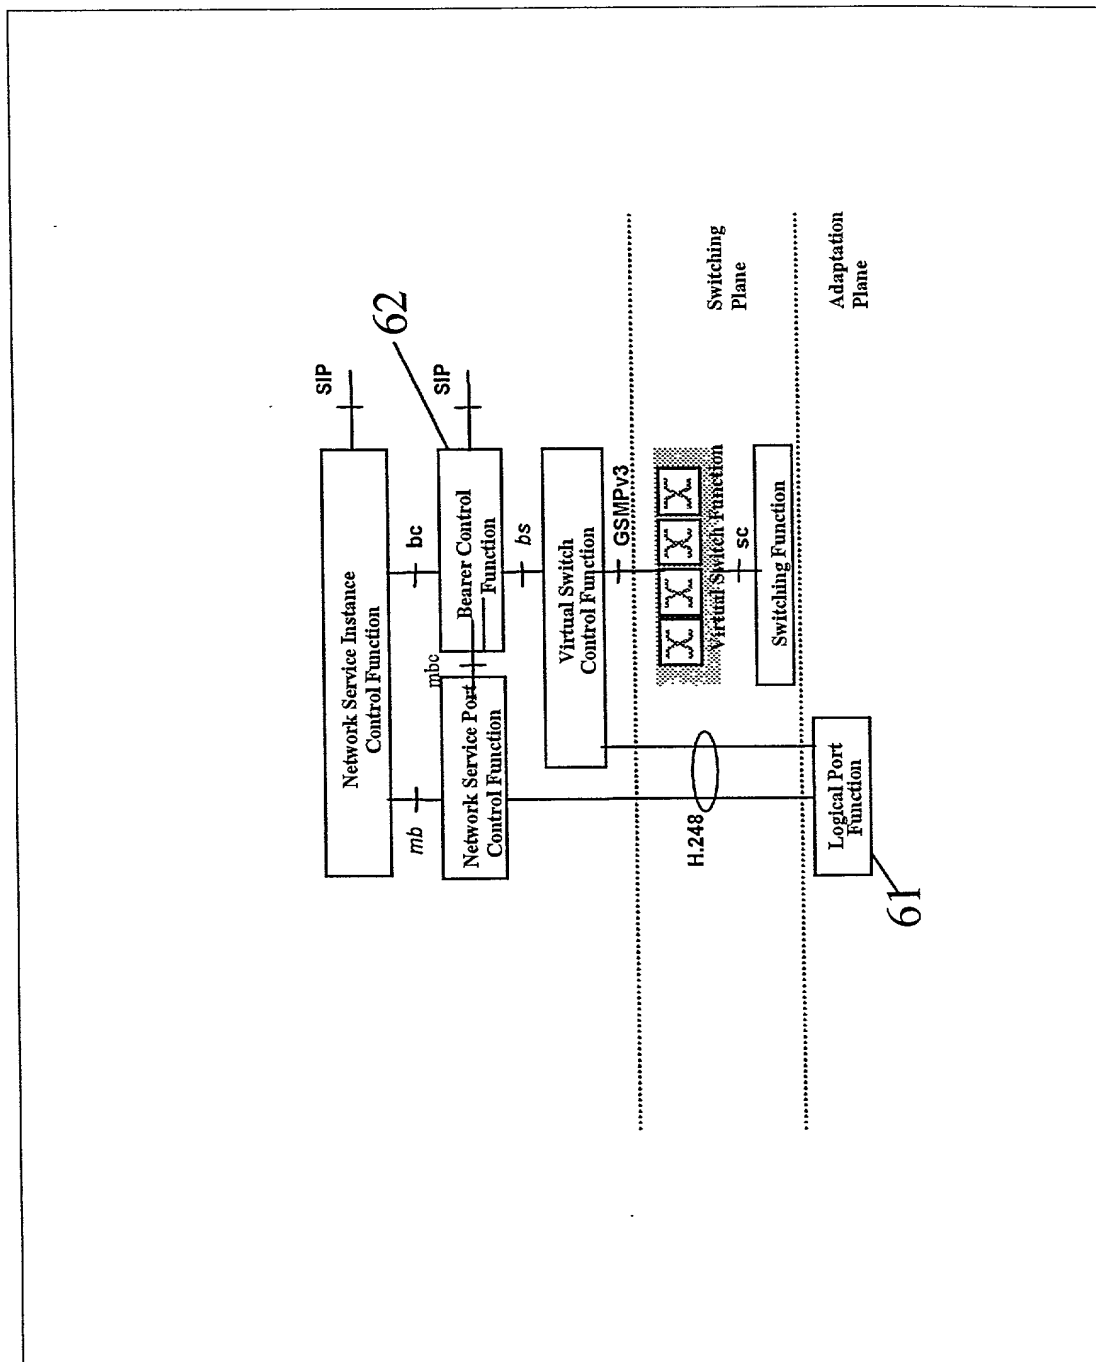


Fig. 8

Release 1 IP Adaptation and Switching Planes

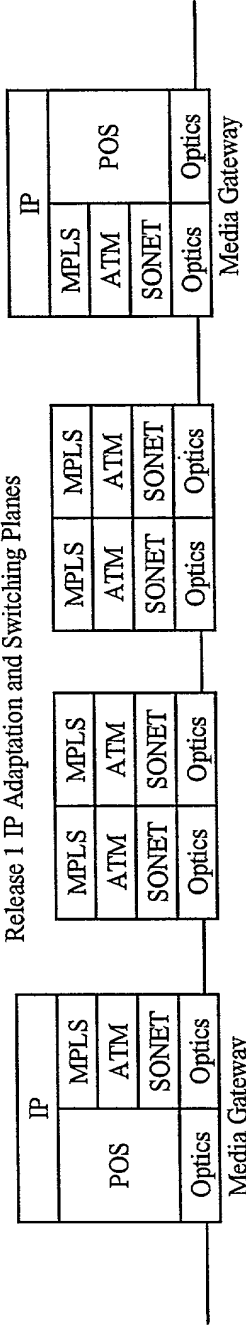


Fig. 9a

Release 2 IP Adaptation and Switching Planes option

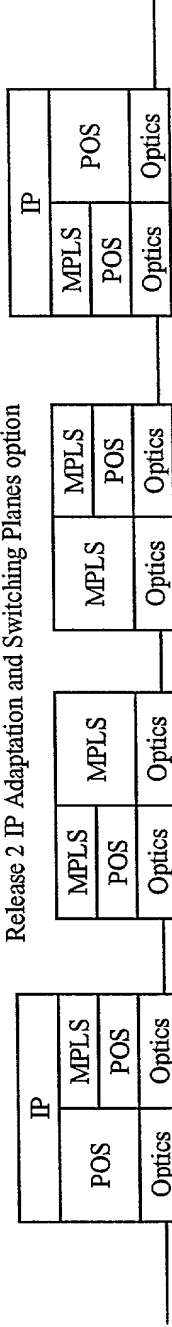


Fig. 9b

Release 1 Legacy Adaptation and Switching Planes

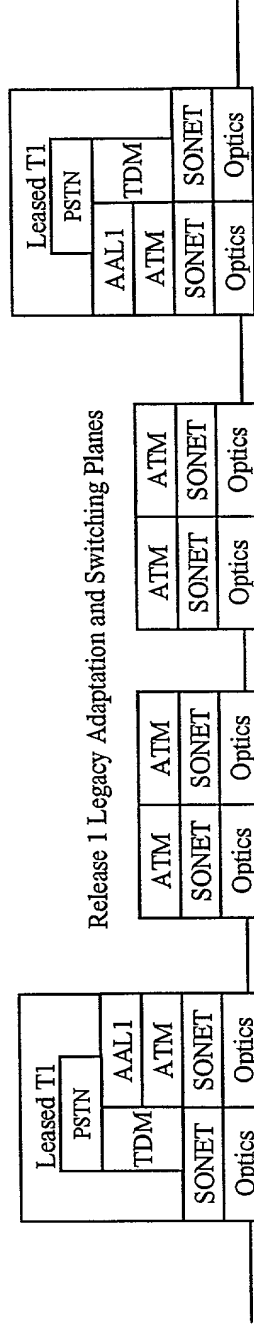


Fig. 9c

Release 2 Legacy Adaptation and Switching Planes option

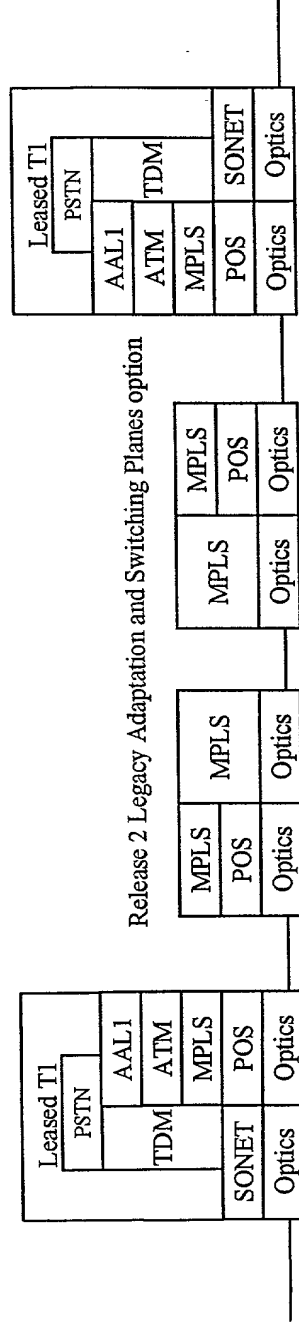


Fig. 9d

Fig. 9

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"Communications Network"**, the specification of which:

- ☒ is attached hereto.
- ☐ was filed on _____ as
Application Serial No. _____
and was amended on _____ if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate

having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

<u>Country</u>	<u>Number</u>	<u>Date Filed</u>	<u>Priority Claimed</u>	
			<u>Yes</u>	<u>No</u>
<u>United Kingdom</u>	0001040.5	17/01/00	<input checked="" type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
_____	_____	_____
_____	_____	_____

And I hereby appoint Wm. Marshall Lee, Registration No. 16,853, John M. Mann, Registration No. 17,775, Thomas E. Smith, Registration No. 18,243, Dennis M. McWilliams, Registration No. 25,195, James R. Sweeney, Registration No. 18,721, William M. Lee, Jr., Registration No. 26,935, Glenn W. Ohlson, Registration No. 28,455, David C. Brezina, Registration No. 34,128, Jeffrey R. Gray, Registration No. 33,391, Timothy J. Engling, Registration No. 39,970, Gregory B. Beggs, Registration No. 19,286, Gerald S. Geren, Registration No. 24,528 and Peter J. Shakula, Registration No. 40,808 as my attorneys to prosecute this application and to transact

all business in the Patent and Trademark Office connected herewith. It is requested that all communications be directed to Lee, Mann, Smith, McWilliams, Sweeney & Ohlson, P.O. Box 2786, Chicago, Illinois 60690-2786, telephone number (312) 368-1300.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Roy Harold Mauger _____

Signature  Date 30/6/00

Country of Residence: Great Britain

Country of Citizenship: Great Britain

Post Office and Residence Address: 47 Beech Avenue
Radlett, Herts
United Kingdom
WD7 7DD